

Valve Assembly 13/16

Applications


Valves are intended for the control of pushers, stops, etc.

Description

Electrically controlled valves.
Complete valve assembly
Plug-in, multiterminal Sub D.
IP 65, 24V AC/DC. Unistable
5/2 valves. Q_n=360Nl/min
(6bar). Supplied without cable.

Order example

803 660
Art.no.

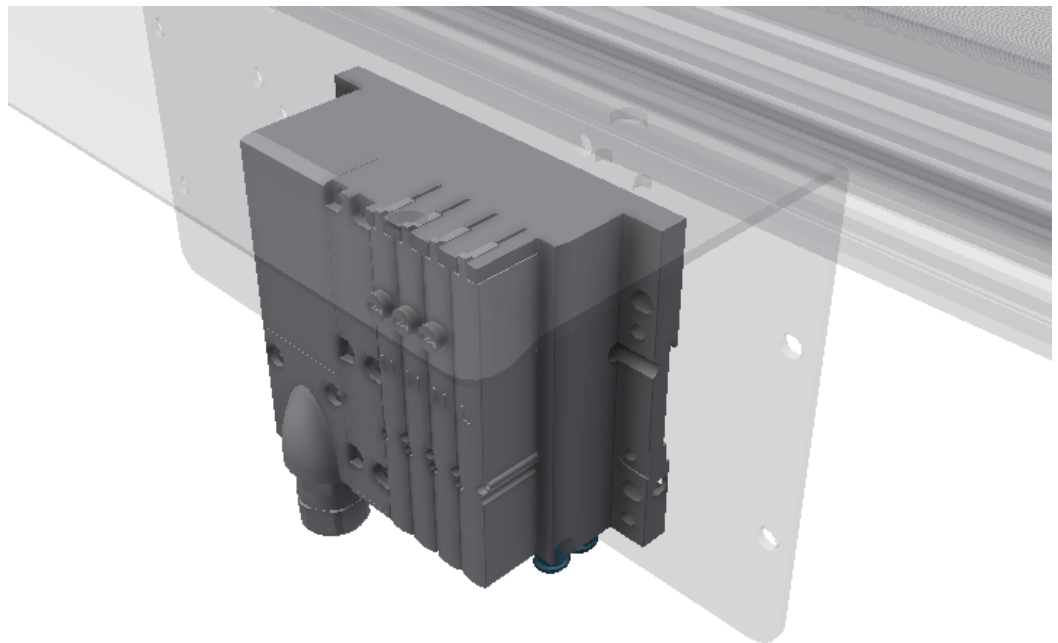

Specification

	Make/Material	Order separately
Valve assembly type 13/16	Festo	
Single valve	Festo	X
Cable	Festo	X
Bracket plate	Steel/Zinc-plated	X



Technical data

Type	Article number	No. of valves	No. of spare places	Max. no. of valve places
13	803 660	3	1	4
14	803 661	5	1	6
15	803 662	7	1	8
Unistable valve	803 663		5/2 – valve Plug-in	
Bistable valve	803 664		5/2 – valve Plug-in	
Closed mid position	803 665		5/3 – valve Plug-in	
Open mid position	803 666		5/3 – valve Plug-in	
Blank plate	803 667			

Cable	Article number	Max 4 valves	Max 12 valves
10m	803 670	X	
15m	803 671	X	
10m	803 672		X
15m	803 673		X

**INTER
SYSTEM**

Tel: +46 431 44 91 00
info@intersystem.se
www.intersystem.se

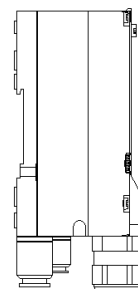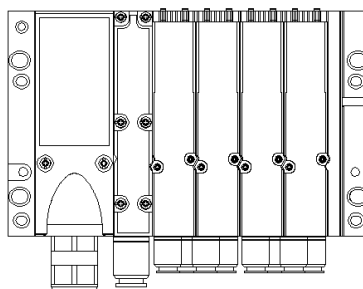

INTER
SYSTEM

Tel: +46 431 44 91 00
info@intersystem.se
www.intersystem.se